

ProMinent® Concept CNPT Timer Pump

ProMinent®


The **ProMinent® Concept CNPT Timer Pump** is an electronic solenoid-driven diaphragm metering pump that will provide automatic timer-controlled dosing of water treatment chemicals.

The timer pump is ideally suited for biocide dosing in cooling towers. It is available in capacity ranges to 15 l/h. The CNPT is accurate, weatherproof, self priming, and can run dry without damage.

PUMP FEATURES

- Concept Metering Pump comprising: **ProMinent Developan®** diaphragm, PTFE coated EPDM diaphragm with steel core and double ball suction discharge check valves providing accurate repeatable metering with extended diaphragm life.
- Capacity adjustment. Four pump speeds 100%, 75%, 50%, 25% and 10 - 100% stroke adjustment allows the pump output to be perfectly tuned to the system being treated.
- Short stroke solenoid drive with PTFE bearings. The drive end is virtually wear free.
- Glass-fibre reinforced PPE pump housing. Resistant to chemical corrosion. High impact tolerance. No external maintenance required. Enclosure rating: IP65.
- Liquid end materials. Available in polypropylene, Plexiglas®

ProMinent® Concept CNPT Timer Pump

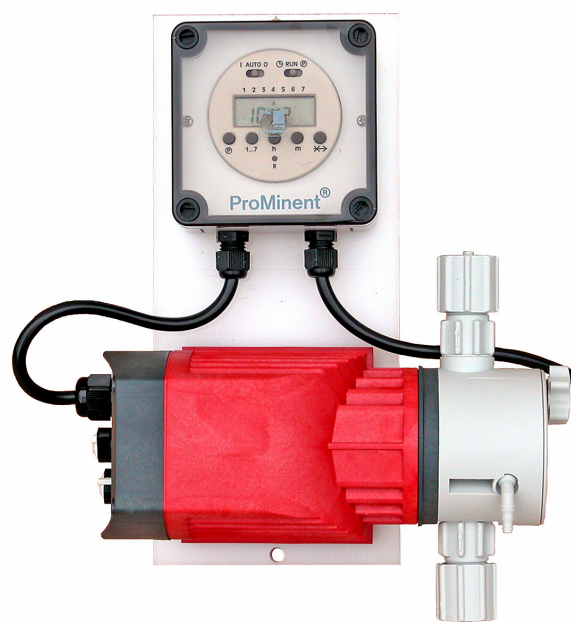

- Manual de-gassing is available with all polypropylene & Plexiglas liquid ends. Fine bleed adjustment allows constant venting.

TIMER FEATURES

- Eight on/off operating programs. Each on/off time may be set to within one minute.
- Five year battery back-up. To preserve time and program details in the event of mains power failure.
- Manual override. For pump priming, testing, calibration, or chemical shock-dosing.
- Integrated timer/pump design. A compact self-contained unit. Simply plugs into a standard three pin outlet.

ACCESSORIES SUPPLIED WITH EVERY CNPT TIMER PUMP INCLUDE:

- Foot valve
- Injection valve
- 5 metre tube pack
- 2 metre power lead with plug

OPTIONAL ACCESSORIES AVAILABLE:

- Low chemical switch
- Anti-siphon valve
- Pulse dampener

SPECIFICATIONS:

- Power Supply: 240 Volts, 50 Hz
- Power consumption:
Typically 12 Watts, 0.69 Amps
- Ambient temperature range to 45 °C
- Enclosure rating: IP65

OTHER PUMPS AVAILABLE:

Our budget range model:

The Alpha APT motor driven Timer Pump Capacity from 0.9 to 18.5 l/h. Total turn-down 10: 1. Timer functions are the same as for the CNPT pump. The Alpha should be installed indoors or undercover.

Other timer pumps available up to 350 l/h upon request.

Plexiglas[®], Liquid Ends also available.

OUR COMMITMENT TO CUSTOMER SERVICE

- Efficient spares service
- Comprehensive workshop facilities
- Renowned after-sales service
- National support network of branches and agents
- Two year drive-end warranty

Please contact us for further information on our CNPT Timer Pump range or for information on other products available.

QLD Office: Unit 1, 68 Murdoch Circuit
ACACIA RIDGE QLD 4110
Ph: (07) 3213 1900 Fx: (07) 3272 0445
Email: pfcqld@prominentfluid.com.au

Prominent Fluid Controls Pty Ltd
www.prominentfluid.com.au
Head Office: Unit 4, 4 Narabang Way
BELROSE NSW 2085
Ph: (02) 9450 0995 Fx: (02) 9450 0996
Email: sales@prominentfluid.com.au

VIC Office: 1/21-22 National Drive
HALLAM VIC 3803
Ph: (03) 8795 7430 Fx: (03) 8795 7431
Email: pfcvic@prominentfluid.com.au

Distributors Throughout Australia & New Zealand
