


Hydraulic metal diaphragm metering pump ORLITA MHHP

Reliable capacity even at maximum pressure

ProMinent®

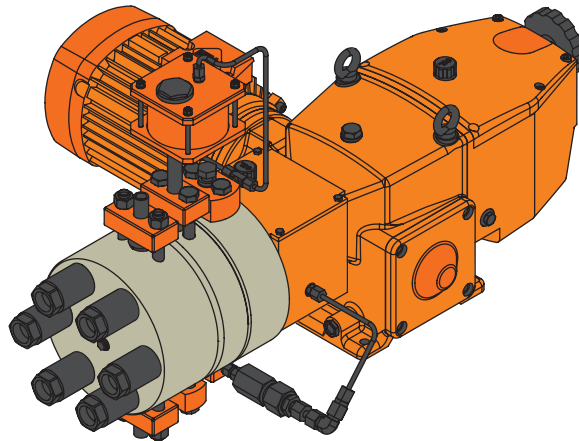

The metal diaphragm metering pumps ORLITA MHHP are special pumps, which provide precise pump capacities even at maximum pressures of up to 3000#bar.

Technical Data

- MSHS: Stroke length: 0–40mm, rod force: 40,000N
- MHRH: Stroke length: 0 – 32mm, Rod force: 15,000N
- Stroke length adjustment range: 0 – 100% in operation and idle
- Stroke length adjustment: manually by means of a manual adjustment wheel and scaled display (optionally with electric actuator or control drive)
- Metering reproducibility is better than $\pm 0.5\%$ within the 10 – 100% stroke length range under defined conditions and with correct installation
- Metal diaphragm
- Integrated hydraulic relief and bleed valve
- Wetted materials: Stainless steel, special designs are available on request
- A wide range of drive versions is available: Three-phase standard motors, motors for use in areas at risk from explosion, different flange designs for the use of customer-specific motors
- Degree of protection: IP 55
- Temperature range -10°C to +60°C



Hydraulic metal diaphragm metering pump ORLITA MHHP

Reliable capacity even at maximum pressure

ProMinent®

Technical Data

Pump type	Plunger Ø	Theor. stroke volume	Max. capacity (theo.) in l/h at strokes/min (50#Hz)				Max. pressure
	mm	ml/stroke	58 l/h	87 l/h	116 l/h	145 l/h	bar
MHRH 150/	7	1.23	4.2	6.4	8.5	10.7	3,000

■ **SYDNEY OFFICE**
4 Narabang Way,
BELROSE NSW 2085
P 02 9450 0995
sales@prominentfluid.com.au

■ **QUEENSLAND OFFICE**
Unit 1, 68 Murdoch Circuit,
ACACIA RIDGE QLD 4110
P 07 3213 1900
pfcqld@prominentfluid.com.au

■ **VICTORIA OFFICE**
27 Sierra Circuit
PAKENHAM VIC 3810
P 03 8795 7430
pfcvic@prominentfluid.com.au

■ **WESTERN AUSTRALIA OFFICE**
2/158 Francisco Street
BELMONT WA 6104
pfcwa@prominentfluid.com.au
www.prominentfluid.com.au