

# Dual Cylinder Scale

The PA24003360 is a rugged, dependable weighing system for compressed gas cylinders, providing an independent, accurate, highly visible and readable indication of the weight on each weigh platform.

Clearly the most advanced design available, the PA24003360 incorporates features that eliminate most of the problems that plague similar competitive scales, and the scale base is warranted for a full 5 years.

The NEMA 4X-housed EI-2000 Dual Channel Indicator Transmitter is provided for local weight display and parameter adjustment.



## Features

- Non-corroding, highly impact resistant plastic scale base warranted for 5 years
- Electronics and environmentally sealed load cells mounted in NEMA 4X enclosure on top of scale base
- Sensing elements mounted above weighing surface away from sources of corrosion and easily accessible for service
- Reliable lever type weigh system
- No long support column eliminates deflection errors
- Cylinder support bracket and chains wall mounted for added safety (optional)
- Factory assembled and ready for use

## Ideal for Corrosive Environments

The scale base is manufactured from solid PVC, which will not corrode and is highly impact resistant. The scale base has two independent weighing platforms, one for each of two compressed gas cylinders.

The weight of each cylinder is transmitted to an environmentally sealed strain gauge load cell via a reliable, time-proven lever system. The scale electronics and load cells are mounted on top of the scale platform, away from most sources of corrosion, in a NEMA 4X fibreglass enclosure ensuring full time integrity of the weighing system. 4.5m of multi-conductor load cell cable comes with each scale. Additional cable is available for order.

Because the scale has no support column, which traditionally houses cables or rods to transmit load to the cells, deflection errors associated with transmission rods or cables are completely eliminated.

The scale is furnished with a highly accurate EI-2000 Dual Channel Indicator/Transmitter which provides two large, independent LED displays and isolated 4-20 mAdc output signals, one for each weighing platform. The indicator is housed in a NEMA 4X fibreglass enclosure for local field mounting. Refer to Product Data Sheet EI-1000/2000 for technical details and additional capabilities of the EI-2000 instrument.

Unlike other scales which mount a bracket and chains to the support column, the P24003360 is supplied as standard with a separate cylinder support bracket and safety chains designed for mounting to a wall to provide additional margins of safety for user personnel.

# Dual Cylinder Scale

## Physical Specifications

No. OF PLATFORMS	2
CAPACITY	163 kg PER PLATFORM
CYLINDER SIZE	305 mm DIA. MAX
PLATFORM HEIGHT	41 mm
ACCURACY	± 0.25% FULL SCALE
LOAD CELL NOMINAL OUTPUT	0.9 mVN
OVERLOAD CAPACITY	1 50% RATED CAPACITY
TEMPERATURE COMPENSATED RANGE	46°C
OPERATING TEMPERATURE RANGE	0-48°C
HOOK-UP CABLE	4.5 m 6-CONDUCTOR
CELL INPUT VOLTAGE	5-15 VDC
INPUT RESISTANCE	350 OHMS MIN.
OUTPUT RESISTANCE	350 OHMS NOM.
SHIPPING WEIGHT	16 kg



## Weigh Indicator Specifications

DISPLAY	Two 4-DIGIT, 0.56"
	7 SEGMENT LED
INPUT RANGE	-0.4 TO 3.3 mVN
OUTPUT	Two 4-20 made into 400 OHMS
LINEARITY	± 0.1 o/o
POWER REQUIREMENT	240 VAC 50Hz
TEMPERATURE RANGE	-10 TO 40°C
ENCLOSURE TYPE	NEMA 4X SURFACE MOUNT

## Options

LOW WEIGHT ALARM RELAYS*	AC - 250V, 1.3A
	DC - 400V, 1.3A
SERIAL COMMUNICATION	R S232 (2 WIRE ) R S485
INDICATOR ENCLOSURE	STAINLESS STEEL
CYLINDER SUPPORT BRACKET & SAFETY CHAINS (STD)	
FLOOR MTG STND FOR INDICATOR	

\*Customer to specify AC or DC

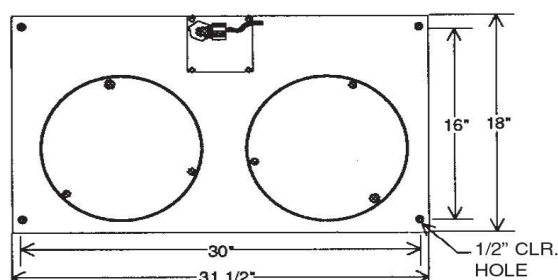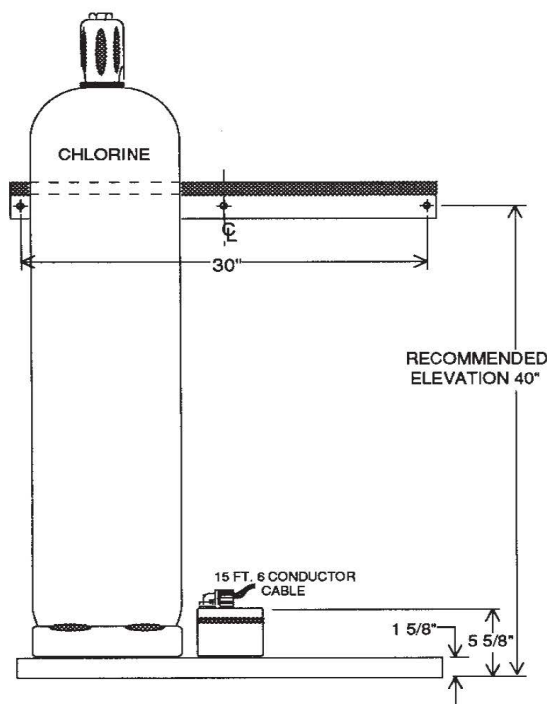

### ■ SYDNEY OFFICE

Unit 4, 4 Narabang Way,  
BELROSE NSW 2085  
P 02 9450 0995 F 02 9450 0996  
sales@prominentfluid.com.au

### ■ QUEENSLAND OFFICE

Unit 1, 68 Murdoch Circuit,  
ACACIA RIDGE QLD 4110  
P 07 3213 1900 F 07 3272 0445  
pfcqld@prominentfluid.com.au

### ■ VICTORIA OFFICE

Unit 1/21-22 National Drive  
HALLAM VIC 3803  
P 03 8795 7430 F 03 8975 7431  
pfcvic@prominentfluid.com.au

### ■ WESTERN AUSTRALIA OFFICE

Office 11, 34 Welshpool Road  
Welshpool WA 6106  
E: pfcwa@prominentfluid.com.au