


Centrifugal Pump von Taine®

The safe and high-quality solution when liquid media need to be pumped leak-free

ProMinent®

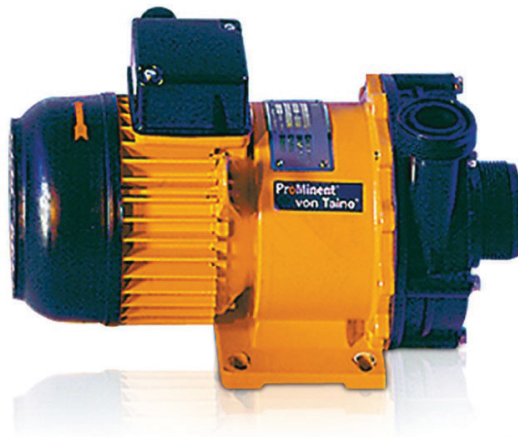

Capacity range up to 22,500 l/h, discharge lift up to 23.5 m WC

The von Taine® pump is a solenoid-coupled centrifugal pump. Thanks to the solenoid coupling, the pump transports the liquid medium from storage tank to storage tank without any leaks or even from a tank to a discharge line. The von Taine® centrifugal pump transports media at up to 22,500 l/h and up to a discharge lift of 23.5 metres. As the pump capacity is highly dependent on the back pressure, always observe the performance curve.

Important note

Check the material tolerability when selecting your pump. Take into consideration the density, viscosity and temperature of the medium to be transported. Please also note: The transported media should not contain any solid fractions. The pump is not self-priming and requires a feed.

Your benefits

- Safe and reliable: Leak-free pumping of liquid chemicals.
- Coupling between motor and impeller via magnetic coupling.

Field of application

- Leak-free pumping of liquid chemicals.



Centrifugal Pump von Taine®

The safe and high-quality solution when liquid media need to be pumped leak-free

Technical Data

von Taine®, PP/FKM Version

	Feed rate at max. pressure	Feed lift max.	Power uptake	Voltage/frequency	Weight	Part No.
	l/h	m	kW		kg	
von Taine® 0502 PP/FKM	1,800	4.5	0.06	1~/230 V/50 Hz	2.7	1023089
von Taine® 0807 PP/FKM	6,600	7.9	0.25	3~/400 V/50 Hz	5.0	1023090
von Taine® 1010 PP/FKM	9,600	10.0	0.37	3~/400 V/50 Hz	7.6	1023091
von Taine® 1313 PP/FKM	13,200	13.2	0.65	3~/400 V/50 Hz	8.7	1023092
von Taine® 1820 PP/FKM	19,500	18.1	1.10	3~/400 V/50 Hz	16.0	1023093
von Taine® 2323 PP/FKM	22,500	23.5	1.50	3~/400 V/50 Hz	17.0	1023094

von Taine®, PVDF/FKM Version

	Feed rate at max. pressure	Feed lift max.	Power uptake	Voltage/frequency	Weight	Part No.
	l/h	m	kW		kg	
von Taine® 0502 PVDF/FKM	1,800	4.5	0.06	1~/230 V/50 Hz	2.8	1023095
von Taine® 0807 PVDF/FKM	6,600	7.9	0.25	3~/400 V/50 Hz	5.2	1023096
von Taine® 1010 PVDF/FKM	9,600	10.0	0.37	3~/400 V/50 Hz	8.0	1023097
von Taine® 1313 PVDF/FKM	13,200	13.2	0.65	3~/400 V/50 Hz	9.0	1023098
von Taine® 1820 PVDF/FKM	19,500	18.1	1.10	3~/400 V/50 Hz	16.7	1023099
von Taine® 2323 PVDF/FKM	22,500	23.5	1.50	3~/400 V/50 Hz	17.7	1023100

von Taine®, PP/EPDM Version

	Feed rate at max. pressure	Feed lift max.	Power uptake	Voltage/frequency	Weight	Part No.
	l/h	m	kW		kg	
von Taine® 0502 PP/EPDM	1,800	4.5	0.06	1~/230 V/50 Hz	2.7	1028551
von Taine® 0807 PP/EPDM	6,600	7.9	0.25	3~/400 V/50 Hz	5.0	1028552
von Taine® 1010 PP/EPDM	9,600	10.0	0.37	3~/400 V/50 Hz	7.6	1028553
von Taine® 1313 PP/EPDM	13,200	13.2	0.65	3~/400 V/50 Hz	8.7	1028564
von Taine® 1820 PP/EPDM	19,500	18.1	1.10	3~/400 V/50 Hz	16.0	1028565
von Taine® 2323 PP/EPDM	22,500	23.5	1.50	3~/400 V/50 Hz	17.0	1028566

von Taine®, PVDF/EPDM Version

	Feed rate at max. pressure	Feed lift max.	Power uptake	Voltage/frequency	Weight	Part No.
	l/h	m	kW		kg	
von Taine® 0502 PVDF/EPDM	1,800	4.5	0.06	1~/230 V/50 Hz	2.8	1028567
von Taine® 0807 PVDF/EPDM	6,600	7.9	0.25	3~/400 V/50 Hz	5.2	1028568
von Taine® 1010 PVDF/EPDM	9,600	10.0	0.37	3~/400 V/50 Hz	8.0	1028569
von Taine® 1313 PVDF/EPDM	13,200	13.2	0.65	3~/400 V/50 Hz	9.0	1028570
von Taine® 1820 PVDF/EPDM	19,500	18.1	1.10	3~/400 V/50 Hz	16.7	1028571
von Taine® 2323 PVDF/EPDM	22,500	23.5	1.50	3~/400 V/50 Hz	17.7	1028572



Centrifugal Pump von Taine®

The safe and high-quality solution when liquid media need to be pumped leak-free

Parameters For Use

	Medium temperature max. °C	Maximum density kg/dm ³	Max. viscosity mPas	Max. system pressure at 20° C bar
von Taine® 0502 PP	80	1.25...1.35	20	1.0
von Taine® 0807 PP	80	1.20...1.80	20	2.5
von Taine® 1010 PP	80	1.60...2.00	20	2.5
von Taine® 1313 PP	80	1.60...1.90	20	2.5
von Taine® 1820 PP	80	1.10...1.80	20	5.0
von Taine® 2323 PP	80	1.00...2.00	0	5.0
von Taine® 0502 PVDF	95	1.25...1.35	20	1.0
von Taine® 0807 PVDF	95	1.20...1.80	20	2.5
von Taine® 1010 PVDF	95	1.60...2.00	20	2.5
von Taine® 1313 PVDF	95	1.60...1.90	20	2.5
von Taine® 1820 PVDF	95	1.10...1.80	20	5.0
von Taine® 2323 PVDF	95	1.00...2.00	20	5.0

■ SYDNEY OFFICE

Unit 4, 4 Narabang Way,
BELROSE NSW 2085
P 02 9450 0995
F 02 9450 0996
sales@prominentfluid.com.au

■ QUEENSLAND OFFICE

Unit 1, 68 Murdoch Circuit,
ACACIA RIDGE QLD 4110
P 07 3213 1900
F 07 3272 0445
pfcqld@prominentfluid.com.au

■ VICTORIA OFFICE

Unit 1/21-22 National Drive
HALLAM VIC 3803
P 03 8795 7430
F 03 8975 7431
pfcvic@prominentfluid.com.au

■ WESTERN AUSTRALIA OFFICE

2/158 Francisco Street
BELMONT WA 6104
pfcwa@prominentfluid.com.au

www.prominentfluid.com.au