


Peristaltic Pump DULCO[®] flex DFCa

High pump capacities and long service life

ProMinent[®]

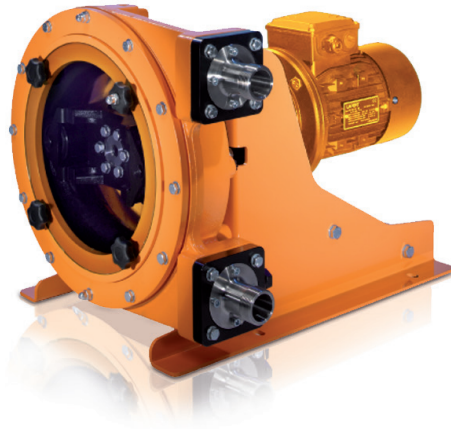

Feed rates of up to 8,900 l/h at 8 bar

It is ideal for heavy-duty industrial applications and pump capacities of up to 8,900 l/h at 8 bar back pressure.

A ball-bearing mounted rotor ensures extremely smooth running and a long service life. Pumps with a Halar-coated pump housing can be produced for use in the chemical industry.

A vacuum unit can optionally be used to help the hose to return to its original shape with pumps of the product range DFCa, thereby improving their suction behaviour and ensuring the even feed of high-viscosity media.

Your benefits

- Simple to operate.
- Reversible pumping direction.
- Hose materials suitable for various chemicals.
- Simple and quick hose change.
- Ideal for pumping pasty, high-viscosity, abrasive and gaseous media.
- Self-priming.

Field of application

- Chemical industry.
- Waste water.
- Mining.



Peristaltic Pump DULCO® flex DFCa

Low and medium pump capacities

ProMinent®

Technical Data

Hose	NR, NBR, EPDM, NR-A, Norprene, NBR-A
Self-priming	up to 8 m
Rollers / shoes	Rollers

Type	Feed rate/ revolution	Delivery rate at max. back pressure		Hose diameter (internal)	Max. solids	Weight without drive	Connection DN
	l/rev.	bar	l/h	mm	mm	kg	
DFCa 030	0.43	8	727	28	7.0	62	DN 32
DFCa 040	0.86	8	1,495	35	8.8	89	DN 40
DFCa 050	1.47	8	1,852	40	10.0	140	DN 40
DFCa 060	3.16	8	5,100	55	13.8	235	DN 50
DFCa 070	6.72	8	8,900	65	16.3	440	DN 65

■ SYDNEY OFFICE

Unit 4, 4 Narabang Way,
BELROSE NSW 2085
P 02 9450 0995
F 02 9450 0996
sales@prominentfluid.com.au

■ QUEENSLAND OFFICE

Unit 1, 68 Murdoch Circuit,
ACACIA RIDGE QLD 4110
P 07 3213 1900
F 02 9450 0996
pfcqld@prominentfluid.com.au

■ VICTORIA OFFICE

Unit 1/21-22 National Drive
HALLAM VIC 3803
P 03 8795 7430
F 02 9450 0996
pfcvic@prominentfluid.com.au

■ WESTERN AUSTRALIA OFFICE

Office 11, 34 Welshpool Road
WELSHPOOL WA 6106
pfcwa@prominentfluid.com.au