
Rotary Lobe Pump ROTADOS

The robust solution for the pumping of viscose media and media containing solids

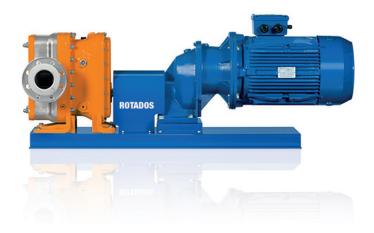

Capacity range 25-100 m³/h, 10-4 bar

The rotary lobe pump is robust and surprisingly powerful given its compact dimensions: depending on the model it can pump up to 100 m³/h viscose media and media containing solids, even containing larger particles of solids. It can be used with ease as a self-priming pump with reversible pumping direction. And naturally it is absolutely safe to operate as an intermediate chamber reliably separating the pumped medium from the gear oil.

The carefully selected materials, high-grade workmanship and maintenance-friendly construction make the rotary lobe pump into a low-wear endurance pump. A three-phase motor drives the two rotary pistons via a precision gear perfectly synchronised and thus also quietly. Corresponding drive versions enable the pump to be connected to bus systems and thus integrated into modern production environments.

Your benefits

- Pump complete with drive motor, reduction gear system, clutch and base plate
- Housing material AISI-316 or AISI 420, rotary piston and shaft seals made of NBR, EPDM or FKM
- Constant i.e. non-pulsing feed rates
- Valveless construction enables reversed pump direction
- Different versions of power end/drive via three-phase motor (On/Off mode, adjustable motor with integrated frequency converter or external fan)
- Connection to bus system is possible (integrated frequency converter needed)
- Hydraulic connection as standard by means of DIN flange (DN 50, 65, 80, 100, 125), other connectors available
- Simple replacement of wear discs thanks to maintenance-friendly construction







ProMinent®

Rotary Lobe Pump ROTADOS

The robust solution for the pumping of viscose media and media containing solids

Technical Data

Rotary lobe pump ROTADOS

| | Flange | Max. pump volume | Max. pressure | Weight | Part No. |
|----------|--------|------------------|---------------|--------|------------|
| | | m³/h | bar | kg | |
| Type 070 | DN 65 | 25 | 10 | 80 | on request |
| Type 090 | DN 80 | 35 | 6 | 85 | on request |
| Type 100 | DN 100 | 80 | 8 | 185 | on request |
| Type 125 | DN 125 | 100 | 4 | 195 | on request |

P 02 9450 0995 F 02 9450 0996 sales@prominentfluid.com.au Unit 1, 68 Murdoch Circuit, ACACIA RIDGE QLD 4110 P 07 3213 1900 F 07 3272 0445 pfcqld@prominentfluid.com.au

VICTORIA OFFICE

Unit 1/21-22 National Drive HALLAM VIC 3803 P 03 8795 7430 F 03 8975 7431 pfcvic@prominentfluid.com.au

WESTERN AUSTRALIA OFFICE 2/158 Francisco Street

BELMONT WA 6104
pfcwa@prominentfluid.com.au